



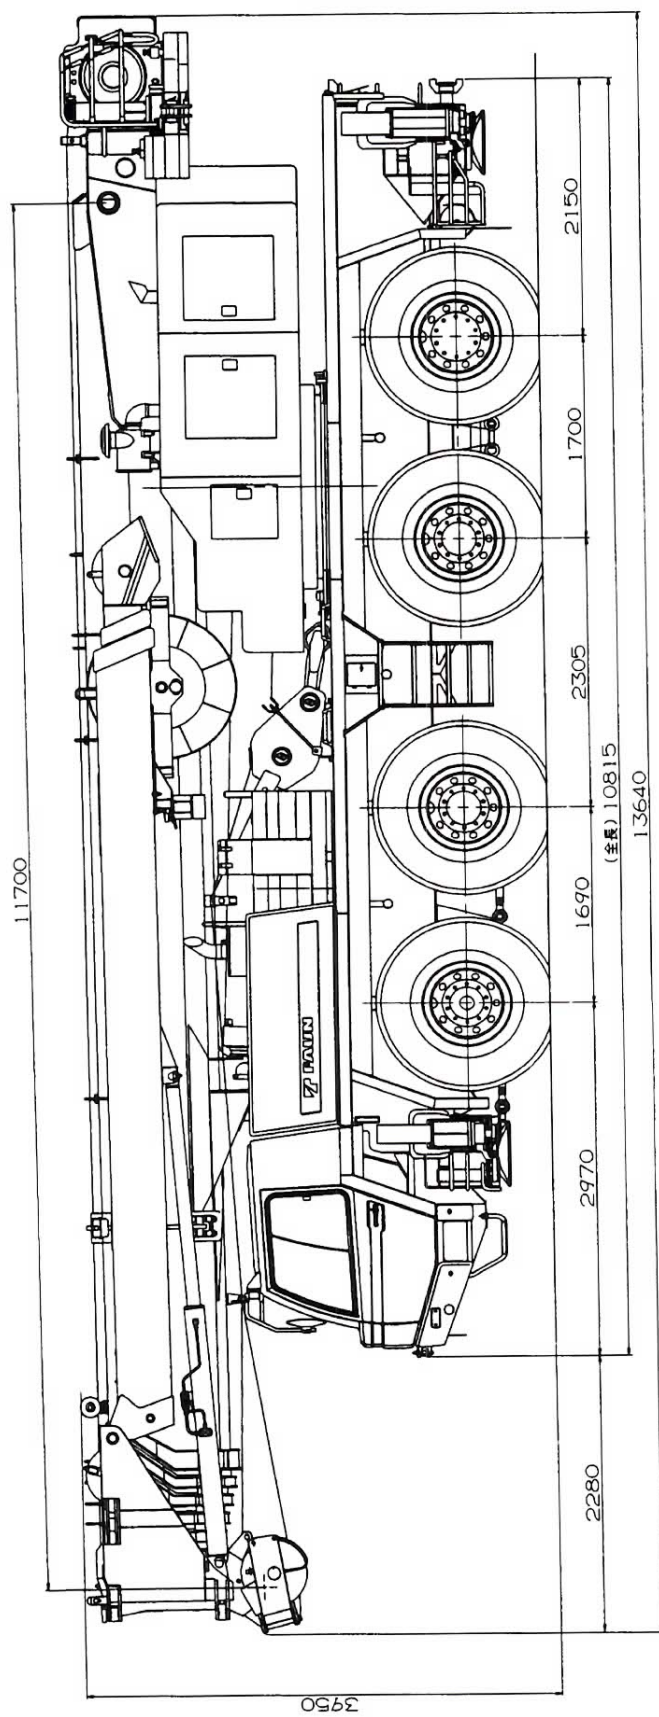



タダノ オールテレーンクレーン
GA-1000N 型
(6段ブーム)
仕 様 書

キャリア FAUN RTF 101-4
スペック番号 GA-1000N-1-90101

[構内走行状態図]

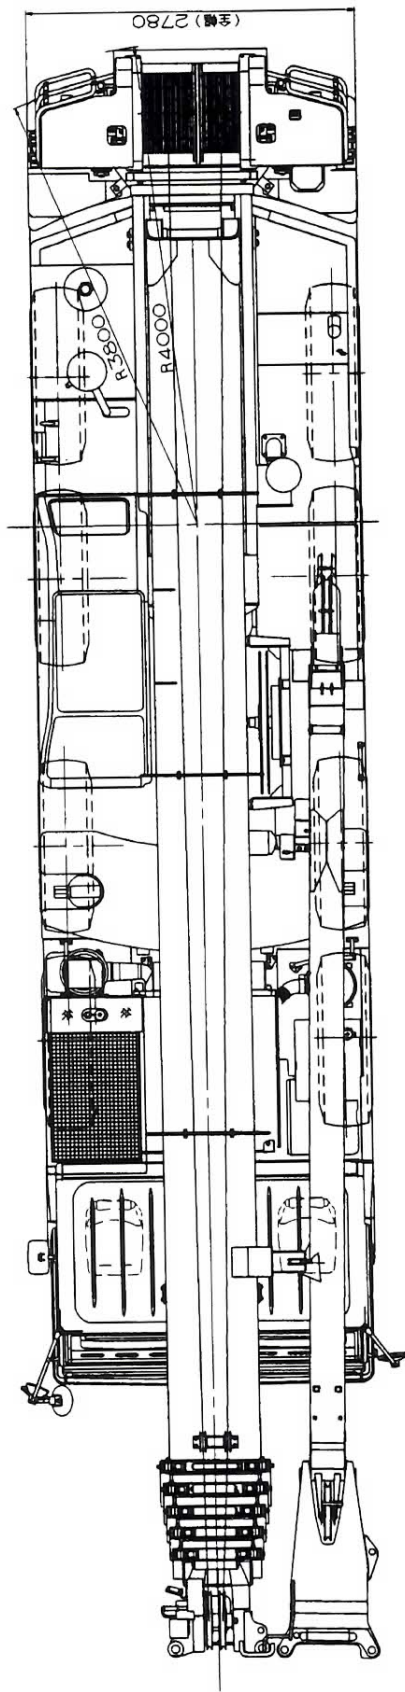


4. 外 観 図 [公道走行状態]

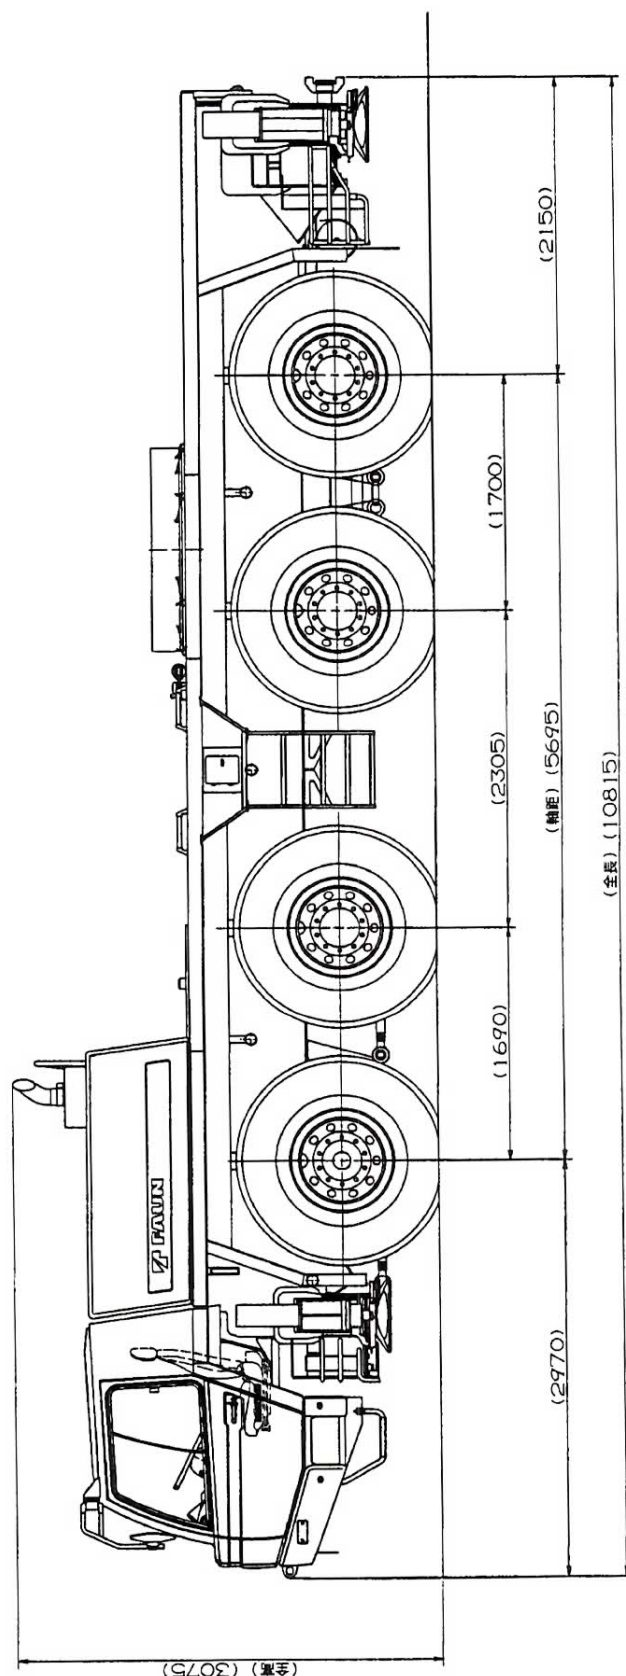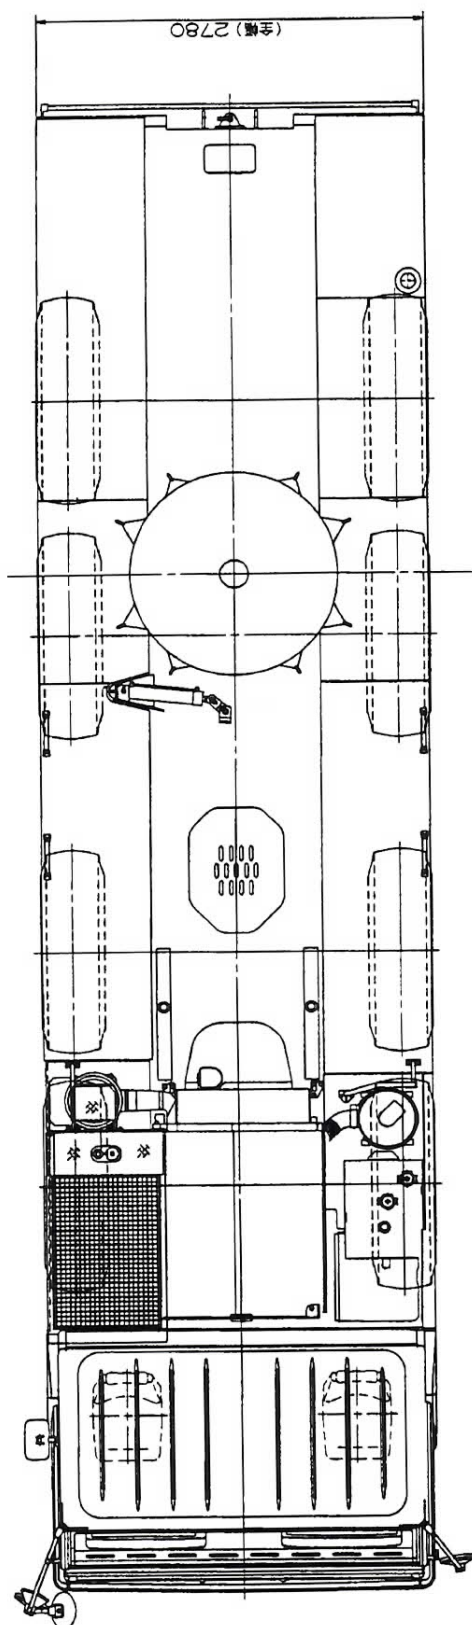


3. 作業半径 - 揚程図

A性能 (1)

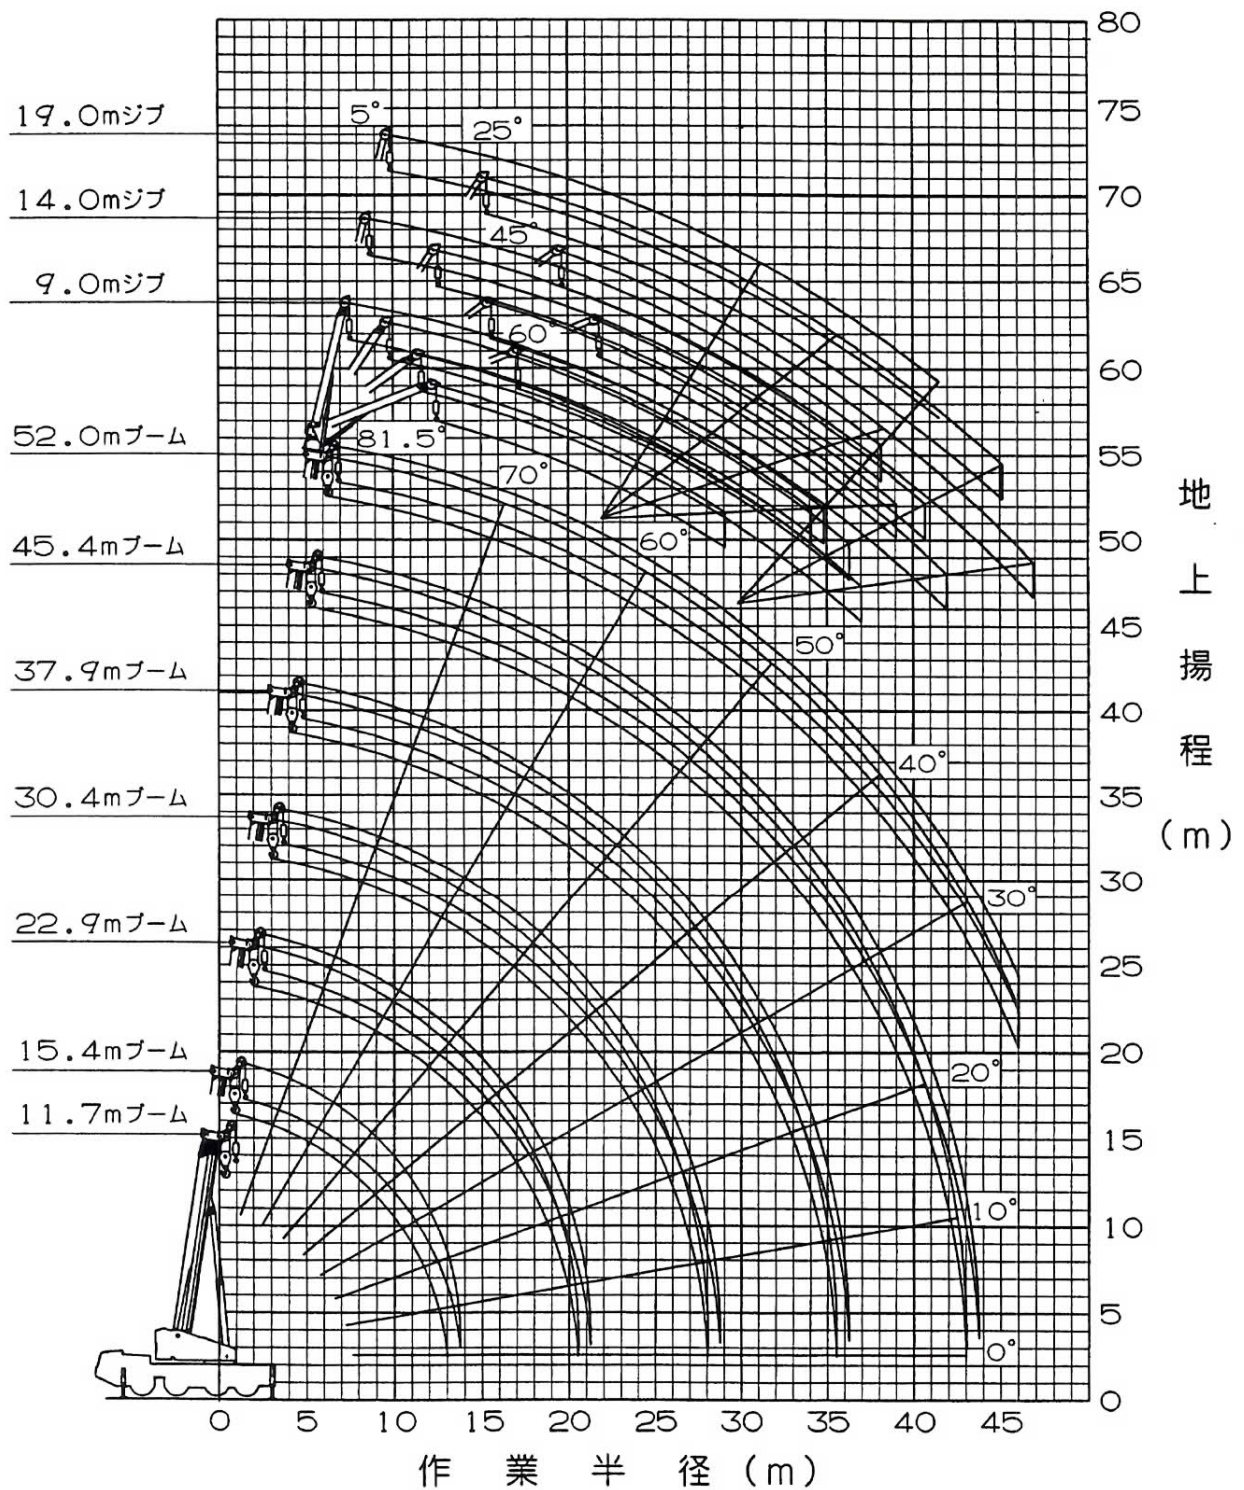

(注) 上図はブーム及びジブのたわみを含んでいません。

A性能 (2)

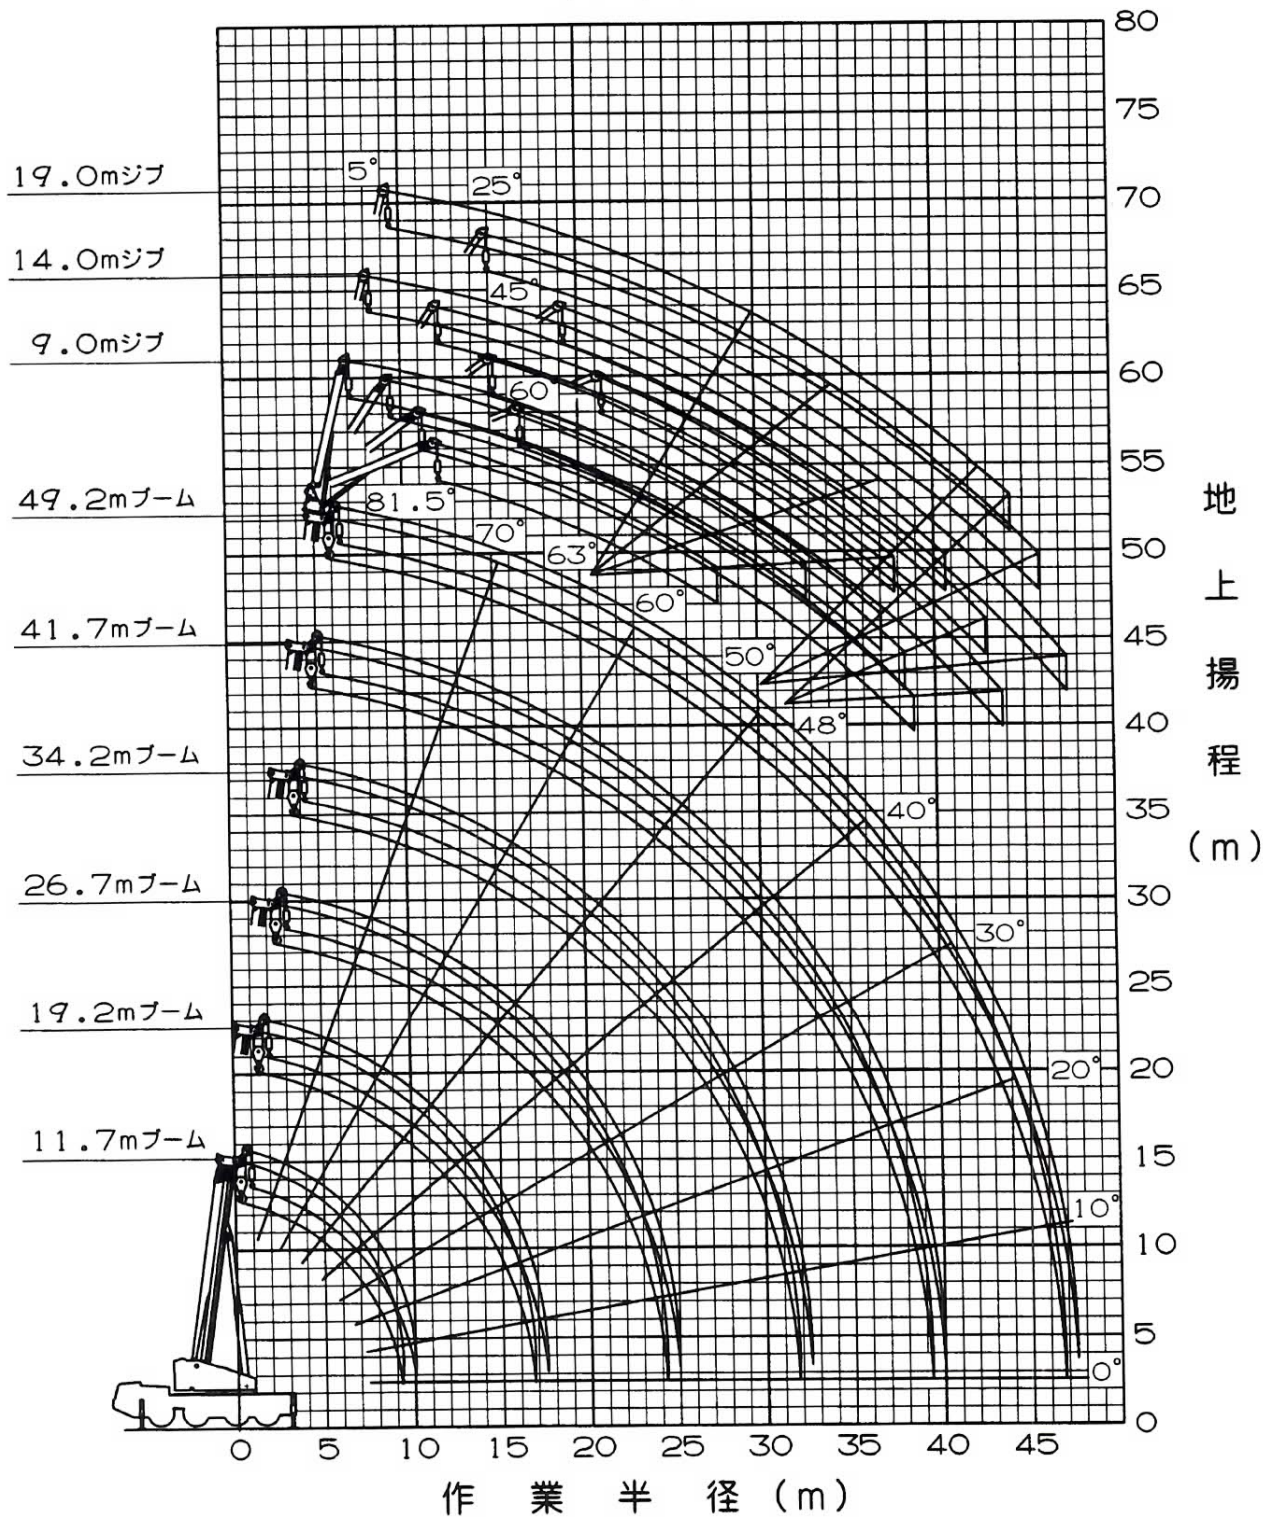

(注) 上図はブーム及びジブのたわみを含んでいません。

A性能

「カウンタウェイト	21 t
アウトリガ張出幅	7.2 m

单位: t

[ブ ー ム]

A性能
 [カウンタウエイト 21t
 アウトリガ張出幅 7.2m]

単位: t

性能番号	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
ブーム長さ	19.2m	22.9m	26.7m	30.4m	34.2m	37.9m	41.7m	41.7m	45.4m	52.0m	15.4m	19.2m	22.9m	26.7m	22.9m	26.7m	30.4m
作業半径 (m)																	
2.8	32.0	32.0									70.0	64.0	53.3		35.0		
3.0	32.0	32.0									70.0	64.0	53.3		35.0		
3.5	32.0	32.0									70.0	64.0	53.3		35.0	35.0	
4.0	30.5	32.0	32.0	32.0							70.0	64.0	53.3	41.5	35.0	35.0	
4.5	29.1	31.7	32.0	29.0							67.2	64.0	52.5	41.5	35.0	35.0	32.1
5.0	27.8	30.4	32.0	29.0							60.0	59.9	49.3	41.5	35.0	35.0	32.1
6.0	25.5	28.1	30.2	29.0	24.9	20.6	19.1	16.5	15.0		41.2	41.1	39.4	33.9	35.0	35.0	31.6
7.0	23.6	26.1	28.2	29.0	24.9	20.6	19.1	16.5	15.0		35.2	35.0	35.4	30.6	35.0	35.0	28.5
8.0	21.9	24.4	26.5	28.2	24.3	20.6	19.1	16.5	15.0		30.4	30.3	30.7	27.8	32.2	31.9	25.9
9.0	20.5	22.9	24.9	26.7	22.2	20.6	19.1	16.5	15.0	9.7	26.6	26.5	26.8	25.4	28.4	28.0	23.7
10.0	19.3	21.6	23.6	25.3	22.8	18.9	17.5	16.6	15.0	9.7	20.5	20.4	20.7	20.4	22.4	22.0	20.1
12.0	17.3	19.4	21.3	22.8	18.9	16.3	15.0	14.2	13.5	9.7		15.4	15.7	15.4	17.2	16.9	16.4
14.0	15.9	17.7	18.1	17.7	13.6	13.1	12.4	10.9	11.8	9.7		12.0	12.3	11.9	13.7	13.4	12.9
16.0	14.3	14.6	14.5	14.1	11.5	11.1	10.8	9.5	10.4	8.9			9.7	9.4	11.1	10.8	10.4
18.0		12.0	11.9	11.5	9.1	9.1	9.2	8.4	9.1	7.9			7.8	7.5	9.2	8.8	8.4
20.0		10.0	9.9	9.5	7.5	7.5	7.7	7.5	7.9	7.1				6.0		7.3	6.9
22.0			8.3	8.0	6.7	6.3	6.4	6.7	6.7	6.3				4.8		6.1	5.7
24.0			7.1	6.7	5.2	5.2	5.4	6.0	5.6	5.7							4.7
26.0				5.7	4.4	4.4	4.5	5.1	4.7	5.1							3.9
28.0				4.9	3.7	3.6	3.8	4.4	4.0	4.4							
30.0						3.0	3.2	3.7	3.4	3.8							
32.0						2.5	2.6	3.2	2.8	3.2							
34.0							2.2	2.7	2.4	2.7							
36.0							1.8	2.3	2.0	2.3							
38.0																	
40.0									1.6	1.9							
42.0									1.3	1.6							
44.0										1.3							
46.0										1.0							
ピン無最大荷重	32.0	32.0	32.0	29.0	24.9	20.6	19.1	16.5	15.0	9.7	36.0	34.0	33.0	26.0	33.0	32.0	26.0
θ (°)	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	18~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5
各ブーム段の伸長状態 (%)																	
2段目7-Δ	0	0	0	47	93	93	93	47	93	100	0	47	47	93	0	47	93
3段目7-Δ	0	0	47	47	47	93	93	93	93	100	47	47	93	93	47	47	47
4段目7-Δ	0	47	47	47	47	47	93	93	93	100	0	0	0	0	47	47	47
5段目7-Δ	47	47	47	47	47	47	47	47	93	100	0	0	0	0	47	47	47
6段目7-Δ	47	47	47	47	47	47	47	47	47	100	0	0	0	0	0	0	0
7-Δ掛数	4	4	4	4	4	4	4	4	4	3	9	8	7	7	5	5	5

[ブ ー ム]

B性能
 [カウンタウエイト 16 t
 アウトリガ張出幅 7.2 m]

性能番号 ブーム長さ 作業半径 (m)	1	2	3	4	5	6	7	8	9	10	11
	11.7m	15.4m	19.2m	22.9m	26.7m	30.4m	34.2m	37.9m	41.7m	45.4m	49.2m
2.8	100.0	31.3	23.4	25.9							
3.0	96.2	30.5	22.6	25.2							
3.5	83.0	28.8	21.0	23.5							
4.0	72.3	27.2	19.6	22.1	22.5						
4.5	63.8	25.7	18.4	20.8	20.9	22.5					
5.0	56.9	24.5	17.3	19.7	19.6	21.5					
6.0	46.5	22.3	15.4	17.7	17.3	19.1	18.6				
7.0	38.8	20.5	13.9	16.1	15.5	17.2	18.6	16.2	14.4		
8.0	33.1	19.0	12.7	14.8	14.0	15.7	16.8	16.2	14.4	13.3	
9.0	28.5	17.7	11.6	13.6	12.8	14.3	15.3	16.2	14.4	13.3	12.5
10.0		16.7	10.7	12.6	11.7	13.2	13.9	15.2	14.4	13.3	12.5
12.0		15.1	9.3	11.0	10.0	11.3	11.6	12.9	12.8	13.3	12.5
14.0			8.2	9.8	8.6	9.9	10.0	11.1	10.9	11.9	12.5
16.0			7.3	8.8	7.6	8.8	8.6	9.7	9.4	10.3	11.0
18.0				8.0	6.8	7.8	7.6	8.5	8.2	9.0	9.7
20.0				7.4	6.1	7.1	6.7	7.6	7.2	8.0	8.4
22.0					5.5	6.4	6.0	6.8	6.4	7.1	6.9
24.0					5.1	5.9	5.4	6.1	5.7	6.2	5.8
26.0						5.5	4.9	5.6	5.1	5.2	4.9
28.0						5.1	4.4	4.9	4.6	4.4	4.1
30.0							4.0	4.2	4.0	3.7	3.4
32.0								3.7	3.4	3.2	2.8
34.0								3.2	2.9	2.7	2.3
36.0									2.5	2.3	1.9
38.0									2.1	1.9	1.5
40.0										1.6	1.2
42.0										1.3	0.9
ピン無最大荷重	42.0	31.3	23.4	25.9	22.5	22.5	18.6	16.2	14.4	13.3	12.5
θ (°)	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	23~81.5
各ブーム段の伸長状態 (%)											
2段目7'-4	0	0	0	0	0	0	0	0	0	47	93
3段目7'-4	0	0	0	0	0	0	0	47	93	93	93
4段目7'-4	0	0	0	0	0	47	93	93	93	93	93
5段目7'-4	0	0	0	47	93	93	93	93	93	93	93
6段目7'-4	0	47	93	93	93	93	93	93	93	93	93
7/4掛数	13	4	4	4	4	4	4	4	4	4	4

単位: t

[ブ ー ム]

B性能
 カウンタウエイト 16 t
 アウトリガ張出幅 7.2 m

単位: t

性能番号	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
ブーム長さ	19.2m	22.9m	26.7m	30.4m	34.2m	37.9m	41.7m	41.7m	45.4m	52.0m	15.4m	19.2m	22.9m	26.7m	22.9m	26.7m	30.4m
作業半径 (m)																	
2.8	32.0	32.0									70.0	64.0	53.3		35.0		
3.0	32.0	32.0									70.0	64.0	53.3		35.0		
3.5	32.0	32.0									70.0	64.0	53.3		35.0	35.0	
4.0	30.5	32.0	32.0								70.0	64.0	53.3	41.5	35.0	35.0	
4.5	29.1	31.7	32.0	32.0	29.0						64.3	64.0	52.5	41.5	35.0	35.0	32.1
5.0	27.8	30.4	32.0	32.0	29.0						57.4	57.2	49.3	41.5	35.0	35.0	32.1
6.0	25.5	28.1	30.2	29.0	24.9	20.6	19.1	16.5			46.9	46.8	43.8	38.0	35.0	35.0	32.1
7.0	23.6	26.1	28.2	29.0	24.9	20.6	19.1	16.5	15.0		39.3	39.1	39.4	33.9	35.0	35.0	31.6
8.0	21.9	24.4	26.5	28.2	24.9	20.6	19.1	16.5	15.0		33.5	33.4	33.7	30.6	35.0	34.9	28.5
9.0	20.5	22.9	24.9	26.7	24.3	20.6	19.1	16.5	15.0		28.9	28.8	29.1	27.8	30.7	30.3	25.9
10.0	19.3	21.6	23.6	25.3	22.2	20.6	19.1	16.5	15.0	9.7	25.0	24.8	25.2	24.9	27.0	26.6	23.7
12.0	17.3	19.4	20.6	20.1	18.9	17.5	16.6	14.6	15.0	9.7	17.8	17.7	18.0	17.7	19.7	19.3	18.8
14.0	15.7	16.0	15.8	15.4	15.0	15.0	14.2	12.5	13.5	9.7		13.2	13.5	13.2	15.0	14.7	14.2
16.0	12.4	12.7	12.6	12.2	11.8	11.7	11.9	10.9	11.8	9.7		10.1	10.4	10.1	11.8	11.5	11.0
18.0		10.4	10.2	9.9	9.4	9.4	9.6	9.5	9.8	8.9			8.1	7.8	9.5	9.2	8.7
20.0		8.6	8.4	8.1	7.6	7.6	7.8	8.4	8.0	7.9			6.4	6.1	7.7	7.4	7.0
22.0			7.0	6.7	6.2	6.2	6.4	7.0	6.6	7.1				4.7		6.0	5.6
24.0			5.9	5.5	5.1	5.1	5.2	5.9	5.5	5.9				3.7		4.9	4.5
26.0				4.6	4.2	4.2	4.3	4.9	4.6	5.0							3.6
28.0				3.9	3.4	3.4	3.5	4.1	3.8	4.2							2.9
30.0					2.8	2.7	2.9	3.5	3.1	3.5							
32.0						2.2	2.3	2.9	2.5	2.9							
34.0						1.7	1.8	2.4	2.1	2.4							
36.0							1.4	2.0	1.6	2.0							
38.0							1.1	1.6	1.3	1.6							
40.0									0.9	1.3							
42.0										1.0							
ピン無最大荷重	32.0	32.0	32.0	29.0	24.9	20.6	19.1	16.5	15.0	9.7	36.0	34.0	33.0	26.0	33.0	32.0	26.0
θ (°)	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	2~81.5	0~81.5	20~81.5	30~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5
各ブーム段の伸長状態 (%)																	
2段目ブーム	0	0	0	47	93	93	93	47	93	100	0	47	47	93	0	47	93
3段目ブーム	0	0	47	47	47	93	93	93	93	100	47	47	93	93	47	47	47
4段目ブーム	0	47	47	47	47	47	93	93	93	100	0	0	0	0	47	47	47
5段目ブーム	47	47	47	47	47	47	47	47	93	100	0	0	0	0	47	47	47
6段目ブーム	47	47	47	47	47	47	47	47	47	100	0	0	0	0	0	0	0
ワイヤ掛数	4	4	4	4	4	4	4	4	4	3	9	8	7	7	5	5	5

C性能

「カウンタウェイト	21 t
アウトリガ張出幅	6. 36 m

[illegible]

[ブ ー ム]

C性能

カウンタウエイト 21 t
アウトリガ張出幅 6.36 m

単位: t

性能番号	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
ブーム長さ	19.2m	22.9m	26.7m	30.4m	34.2m	37.9m	41.7m	41.7m	45.4m	52.0m	15.4m	19.2m	22.9m	26.7m	22.9m	26.7m	30.4m
作業半径 (m)																	
2.8	32.0	32.0									70.0	64.0	53.3		35.0		
3.0	32.0	32.0									70.0	64.0	53.3		35.0		
3.5	32.0	32.0									70.0	64.0	53.3		35.0	35.0	
4.0	30.5	32.0	32.0								67.5	64.0	53.3	41.5	35.0	35.0	
4.5	29.1	31.7	32.0	32.0							61.8	61.7	52.5	41.5	35.0	35.0	32.1
5.0	27.8	30.4	32.0	29.0							56.9	56.8	49.3	41.5	35.0	35.0	32.1
6.0	25.5	28.1	30.2	29.0	24.9	20.6	19.1	16.5			48.7	48.6	43.8	38.0	35.0	35.0	31.6
7.0	23.6	26.1	28.2	29.0	24.9	20.6	19.1	16.5	15.0		41.2	41.1	39.4	33.9	35.0	35.0	28.5
8.0	21.9	24.4	26.5	26.7	24.3	20.6	19.1	16.5			30.4	30.3	30.7	27.8	32.2	31.9	25.9
9.0	20.5	22.9	24.9	25.3	22.2	20.6	19.1	16.5	15.0	9.7	26.6	26.5	26.8	25.4	28.4	28.0	23.7
10.0	19.3	21.6	23.6	25.3	22.2	20.6	19.1	16.5	15.0	9.7	20.5	20.4	20.7	20.4	22.4	22.0	20.1
12.0	17.3	19.4	21.3	22.8	18.9	17.5	16.6	14.6	15.0	9.7		15.4	15.7	15.4	17.2	16.9	16.4
14.0	15.9	17.7	18.1	17.7	16.3	15.0	14.2	12.5	13.5	9.7		12.0	12.3	11.9	13.7	13.4	12.9
16.0	14.3	14.6	14.5	14.1	13.6	13.1	12.4	10.9	11.8	9.7			9.7	9.4	11.1	10.8	10.4
18.0		12.0	11.9	11.5	11.1	11.0	10.8	9.5	10.4	8.9			7.8	7.5	9.2	8.8	8.4
20.0		10.0	9.9	9.5	9.1	9.1	9.2	8.4	9.1	7.9				5.8		7.3	6.9
22.0			8.3	8.0	7.5	7.5	7.7	7.5	7.9	7.1				4.5		6.1	5.5
24.0			7.1	6.7	6.3	6.3	6.4	6.7	6.7	6.3							4.4
26.0				5.7	5.2	5.1	5.3	6.0	5.6	5.7							3.5
28.0				4.8	4.2	4.2	4.4	5.1	4.7	5.1							
30.0					3.4	3.4	3.5	4.3	3.8	4.3							
32.0						2.7	2.8	3.6	3.1	3.6							
34.0						2.1	2.2	3.0	2.5	3.0							
36.0							1.7	2.4	2.0	2.4							
38.0							1.3	2.0	1.5	1.9							
40.0									1.1	1.5							
42.0										1.1							
ピン無最大荷重	32.0	32.0	32.0	29.0	24.9	20.6	19.1	16.5	15.0	9.7	36.0	34.0	33.0	26.0	33.0	32.0	26.0
θ (°)	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	16~81.5	28~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5	0~81.5
各ブーム段の伸長状態 (%)																	
2段目7-Δ	0	0	0	47	93	93	93	47	93	100	0	47	47	93	0	47	93
3段目7-Δ	0	0	47	47	47	93	93	93	93	100	47	47	93	93	47	47	47
4段目7-Δ	0	47	47	47	47	47	93	93	93	100	0	0	0	0	47	47	47
5段目7-Δ	47	47	47	47	47	47	47	93	93	100	0	0	0	0	0	0	0
6段目7-Δ	47	47	47	47	47	47	47	47	47	100	0	0	0	0	0	0	0
7-Δ掛数	4	4	4	4	4	4	4	4	4	3	9	8	7	7	5	5	5

[ジ ブ]

A性能
 カウンタウエイト 21t
 アウトリガ張出幅 7.2m

4.9. 2mブーム+フルオートジブ 単位：t

ジブ長さ オフセット アーム角度 (°)	9.0 mジブ				14.0 mジブ				19.0 mジブ			
	5°	25°	45°	60°	5°	25°	45°	60°	5°	25°	45°	60°
	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)
81.5	8.2	6.10	10.8	5.45	12.6	4.70	13.4	4.50	9.4	3.50	13.7	2.85
80	10.5	6.10	13.0	5.45	14.7	4.70	15.4	4.50	11.9	3.50	16.0	2.85
79	11.7	6.10	14.2	5.45	15.7	4.70	16.4	4.50	13.1	3.50	17.2	2.85
78	12.8	6.10	15.3	5.45	16.8	4.70	17.4	4.50	14.3	3.50	18.3	2.85
75	16.2	6.10	18.4	5.10	19.8	4.55	20.2	4.35	18.0	3.50	21.7	2.75
73	18.5	6.10	20.4	4.90	21.7	4.25	22.0	4.10	20.4	3.50	23.8	2.60
70	21.4	5.20	23.4	4.45	24.4	3.90	24.7	3.80	23.7	3.20	26.9	2.45
68	23.3	4.60	25.2	4.15	26.2	3.70	26.4	3.60	25.9	3.00	29.0	2.35
65	26.1	3.85	27.9	3.65	28.8	3.40	28.9	3.40	29.0	2.70	31.9	2.25
63	27.9	3.45	29.6	3.30	30.4	3.15	30.5	3.15	31.0	2.55	33.9	2.20
60	30.5	2.90	32.0	2.75	32.8	2.70			34.0	2.35	36.6	2.10
58	32.1	2.55	33.7	2.45	34.3	2.40			35.8	2.20	38.4	2.05
55	34.6	1.90	35.9	1.85	36.4	1.80			38.4	1.65	40.7	1.55
53	36.0	1.50	37.3	1.50	37.7	1.45			40.0	1.35	42.1	1.25
50	38.1	1.05	39.3	1.05	39.6	1.00			42.2	0.90	44.2	0.85
48	39.5	0.75	40.6	0.80	40.8	0.75			43.6	0.65	45.5	0.65
θ (°)	47~81.5	47~81.5	47~81.5	62~81.5	47~81.5	47~81.5	47~81.5	62~81.5	47~81.5	47~81.5	47~81.5	62~81.5

5.2. 0mブーム+フルオートジブ 単位：t

ジブ長さ オフセット アーム角度 (°)	9.0 mジブ				14.0 mジブ				19.0 mジブ			
	5°	25°	45°	60°	5°	25°	45°	60°	5°	25°	45°	60°
	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)	作業半径 (m)
81.5	8.7	5.20	11.5	5.20	13.4	4.70	14.1	4.50	10.1	3.50	14.4	2.85
80	11.2	5.20	13.9	5.20	15.6	4.70	16.3	4.50	12.7	3.50	16.9	2.85
79	12.4	5.20	15.1	5.20	16.7	4.70	17.4	4.50	14.1	3.50	18.2	2.85
78	13.7	5.20	16.3	5.20	17.9	4.70	18.4	4.45	15.4	3.50	19.4	2.85
75	17.3	5.20	19.7	5.05	21.0	4.30	21.4	4.10	19.3	3.50	22.9	2.70
73	19.6	5.20	21.8	4.65	22.9	4.00	23.3	3.85	21.8	3.50	25.2	2.55
70	22.8	4.45	24.8	4.15	25.9	3.65	26.1	3.60	25.3	3.15	28.5	2.40
68	24.8	3.95	26.7	3.65	27.8	3.45	27.9	3.40	27.6	2.95	30.6	2.30
65	27.7	3.25	29.5	3.05	30.4	2.95	30.5	2.95	30.9	2.65	33.7	2.20
63	29.5	2.85	31.3	2.75	32.1	2.65	32.1	2.65	33.0	2.45	35.8	2.15
60	32.3	2.40	33.9	2.30	34.5	2.20			35.8	2.00	38.5	1.90
58	34.0	2.00	35.5	1.95	36.1	1.85			37.7	1.75	40.2	1.65
55	36.5	1.40	37.8	1.35	38.3	1.30			40.3	1.20	42.6	1.15
53	38.0	1.05	39.3	1.05	39.7	1.00			41.9	0.90	44.1	0.85
θ (°)	52~81.5	52~81.5	52~81.5	62~81.5	52~81.5	52~81.5	52~81.5	62~81.5	52~81.5	52~81.5	52~81.5	62~81.5

[ジ ブ]

B性能
 [カウンタウエイト 16 t
 アウトリガ張出幅 7.2 m]

単位: t

49. 2mブーム+フルオートジブ

ジブ長さ オフセット ブーム角度 (°)	9.0 mジブ						14.0 mジブ						19.0 mジブ					
	5°		25°		45°		5°		25°		45°		5°		25°		45°	
	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重
81.5	8.2	6.10	10.8	5.45	12.6	4.70	13.4	4.50	9.4	3.50	13.7	2.85	16.5	2.10	17.8	1.90	10.9	2.50
80	10.5	6.10	13.1	5.45	14.7	4.70	15.4	4.50	11.9	3.50	16.0	2.85	18.7	2.10	19.8	1.90	13.6	2.50
79	11.7	6.10	14.2	5.45	15.7	4.70	16.4	4.50	13.1	3.50	17.2	2.85	19.7	2.10	20.8	1.90	15.0	2.50
78	12.8	6.10	15.3	5.45	16.8	4.70	17.4	4.50	14.3	3.50	18.3	2.85	20.8	2.10	21.8	1.90	16.3	2.50
75	16.2	6.10	18.4	5.10	19.8	4.55	20.2	4.35	18.0	3.50	21.7	2.75	23.9	2.05	24.7	1.85	22.0	2.25
73	18.5	6.10	20.4	4.90	21.7	4.25	22.0	4.10	20.4	3.50	23.8	2.60	25.9	2.00	26.6	1.85	22.4	2.05
70	21.4	5.20	23.4	4.45	24.4	3.90	24.7	3.80	23.7	3.20	26.9	2.45	28.8	1.95	29.3	1.80	26.0	1.80
68	23.3	4.60	25.2	4.15	26.2	3.70	26.4	3.60	25.9	3.00	29.0	2.35	30.7	1.90	31.0	1.80	28.3	1.70
65	26.1	3.65	27.9	3.50	28.8	3.30	28.9	3.25	29.0	2.70	31.9	2.25	33.4	1.85	33.6	1.80	31.7	1.50
63	27.8	2.95	29.6	2.85	30.4	2.70	30.4	2.70	31.0	2.55	33.9	2.20	35.1	1.85	35.2	1.80	33.8	1.40
60	30.3	2.15	31.9	2.10	32.6	2.00			33.9	1.90	36.5	1.75	37.6	1.65			37.0	1.30
58	31.8	1.65	33.4	1.65	34.0	1.55			35.5	1.50	38.1	1.35	39.1	1.30			39.1	1.25
55	34.2	1.10	35.6	1.10	36.1	1.05			37.9	0.95	40.3	0.90	41.2	0.85			41.9	0.90
53	35.6	0.75	37.0	0.75	37.4	0.75												
θ (°)	52~81.5		52~81.5		52~81.5		62~81.5		54~81.5		54~81.5		62~81.5		54~81.5		54~81.5	

52. 0mブーム+フルオートジブ

単位: t

ジブ長さ オフセット ブーム角度 (°)	9.0 mジブ						14.0 mジブ						19.0 mジブ					
	5°		25°		45°		5°		25°		45°		5°		25°		45°	
	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重
81.5	8.7	5.20	11.5	5.20	13.4	4.70	14.1	4.50	10.1	3.50	14.4	2.85	17.2	2.10	18.5	1.90	11.6	2.50
80	11.2	5.20	13.9	5.20	15.6	4.70	16.3	4.50	12.7	3.50	16.9	2.85	19.5	2.10	20.6	1.90	14.4	2.50
79	12.4	5.20	15.1	5.20	16.7	4.70	17.4	4.50	14.1	3.50	18.2	2.85	20.7	2.10	21.7	1.90	15.9	2.50
78	13.7	5.20	16.3	5.20	17.9	4.70	18.4	4.45	15.4	3.50	19.4	2.85	21.8	2.10	22.8	1.90	17.3	2.50
75	17.3	5.20	19.7	5.05	21.0	4.30	21.4	4.10	19.3	3.50	22.9	2.70	25.1	2.05	25.8	1.85	21.3	2.20
73	19.6	5.20	21.8	4.65	22.9	4.00	23.3	3.85	21.8	3.50	25.2	2.55	27.2	2.00	27.8	1.85	23.8	2.00
70	22.8	4.45	24.8	4.15	25.9	3.65	26.1	3.60	25.3	3.15	28.5	2.40	30.2	1.90	30.7	1.80	27.5	1.75
68	24.8	3.95	26.7	3.65	27.8	3.45	27.9	3.40	27.6	2.95	30.6	2.30	32.2	1.90	32.6	1.80	30.0	1.65
65	27.7	3.05	29.5	2.90	30.4	2.70	30.5	2.65	30.9	2.65	33.7	2.20	35.1	1.85	35.3	1.80	33.5	1.50
63	29.5	2.40	31.2	2.30	32.0	2.15	32.0	2.15	32.9	2.10	35.8	1.90	37.0	1.80	37.0	1.80	35.8	1.40
60	32.0	1.60	33.6	1.55	34.3	1.50			35.6	1.40	38.3	1.30	39.4	1.25			39.1	1.30
58	33.7	1.20	35.2	1.15	35.8	1.10			37.3	1.00	39.8	0.95	40.9	0.90			41.2	1.00
θ (°)	57~81.5		57~81.5		57~81.5		62~81.5		57~81.5		57~81.5		62~81.5		54~81.5		57~81.5	

[ジ ブ]

C性能
 カウンタウエイト 21t
 アウトリガ張幅 6.36m

単位：t

ジブ長さ オフセット アーム角度 (°)	9.0 mジブ				14.0 mジブ				19.0 mジブ			
	25°		45°		25°		45°		25°		45°	
	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重
81.5	8.2	6.10	10.8	5.45	12.6	4.70	13.4	4.50	9.4	3.50	13.7	2.85
80	10.5	6.10	13.1	5.45	14.7	4.70	15.4	4.50	11.9	3.50	16.0	2.85
79	11.7	6.10	14.2	5.45	15.7	4.70	16.4	4.50	13.1	3.50	17.2	2.85
78	12.8	6.10	15.3	5.45	16.8	4.70	17.4	4.50	14.3	3.50	18.3	2.85
75	16.2	6.10	18.4	5.10	19.8	4.55	20.2	4.35	18.0	3.50	21.7	2.75
73	18.5	6.10	20.4	4.90	21.7	4.25	22.0	4.10	20.4	3.50	23.8	2.60
70	21.4	5.20	23.4	4.45	24.4	3.90	24.7	3.80	23.7	3.20	26.9	2.45
68	23.3	4.60	25.2	4.15	26.2	3.70	26.4	3.60	25.9	3.00	29.0	2.35
65	26.1	3.85	27.9	3.65	28.8	3.40	28.9	3.40	29.0	2.70	31.9	2.25
63	27.9	3.45	29.6	3.30	30.4	3.15	30.5	3.15	31.0	2.55	33.9	2.20
60	30.5	2.90	32.0	2.75	32.8	2.70			34.0	2.35	36.6	2.10
58	32.0	2.35	33.6	2.30	34.2	2.20			35.8	2.10	38.3	1.95
55	34.3	1.60	35.7	1.60	36.2	1.55			38.1	1.40	40.4	1.30
53	35.8	1.15	37.1	1.20	37.5	1.15			39.6	1.00	41.9	0.95
θ (°)	52~81.5	52~81.5	52~81.5	52~81.5	62~81.5	62~81.5	52~81.5	52~81.5	52~81.5	52~81.5	52~81.5	52~81.5

単位：t

ジブ長さ オフセット アーム角度 (°)	9.0 mジブ				14.0 mジブ				19.0 mジブ			
	25°		45°		25°		45°		25°		45°	
	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重	作業半径 (m)	定格 総荷重
81.5	8.7	5.20	11.5	5.20	13.4	4.70	14.1	4.50	10.1	3.50	14.4	2.85
80	11.2	5.20	13.9	5.20	15.6	4.70	16.3	4.50	12.7	3.50	16.9	2.85
79	12.4	5.20	15.1	5.20	16.7	4.70	17.4	4.50	14.1	3.50	18.2	2.85
78	13.7	5.20	16.3	5.20	17.9	4.70	18.4	4.45	15.4	3.50	19.4	2.85
75	17.3	5.20	19.7	5.05	21.0	4.30	21.4	4.10	19.3	3.50	22.9	2.70
73	19.6	5.20	21.8	4.65	22.9	4.00	23.3	3.85	21.8	3.50	25.2	2.55
70	22.8	4.45	24.8	4.15	25.9	3.65	26.1	3.60	25.3	3.15	28.5	2.40
68	24.8	3.95	26.7	3.65	27.8	3.45	27.9	3.40	27.6	2.95	30.6	2.30
65	27.7	3.25	29.5	3.05	30.4	2.95	30.5	2.95	30.9	2.65	33.7	2.20
63	29.5	2.85	31.3	2.75	32.1	2.65	32.1	2.65	33.0	2.45	35.8	2.15
60	32.2	2.30	33.8	2.20	34.5	2.10			35.8	1.95	38.5	1.85
58	33.8	1.75	35.4	1.70	35.9	1.60			37.5	1.50	40.0	1.40
55	36.2	1.05	37.6	1.05	38.1	0.95						
θ (°)	54~81.5	54~81.5	54~81.5	54~81.5	62~81.5	62~81.5	57~81.5	57~81.5	57~81.5	57~81.5	57~81.5	57~81.5